


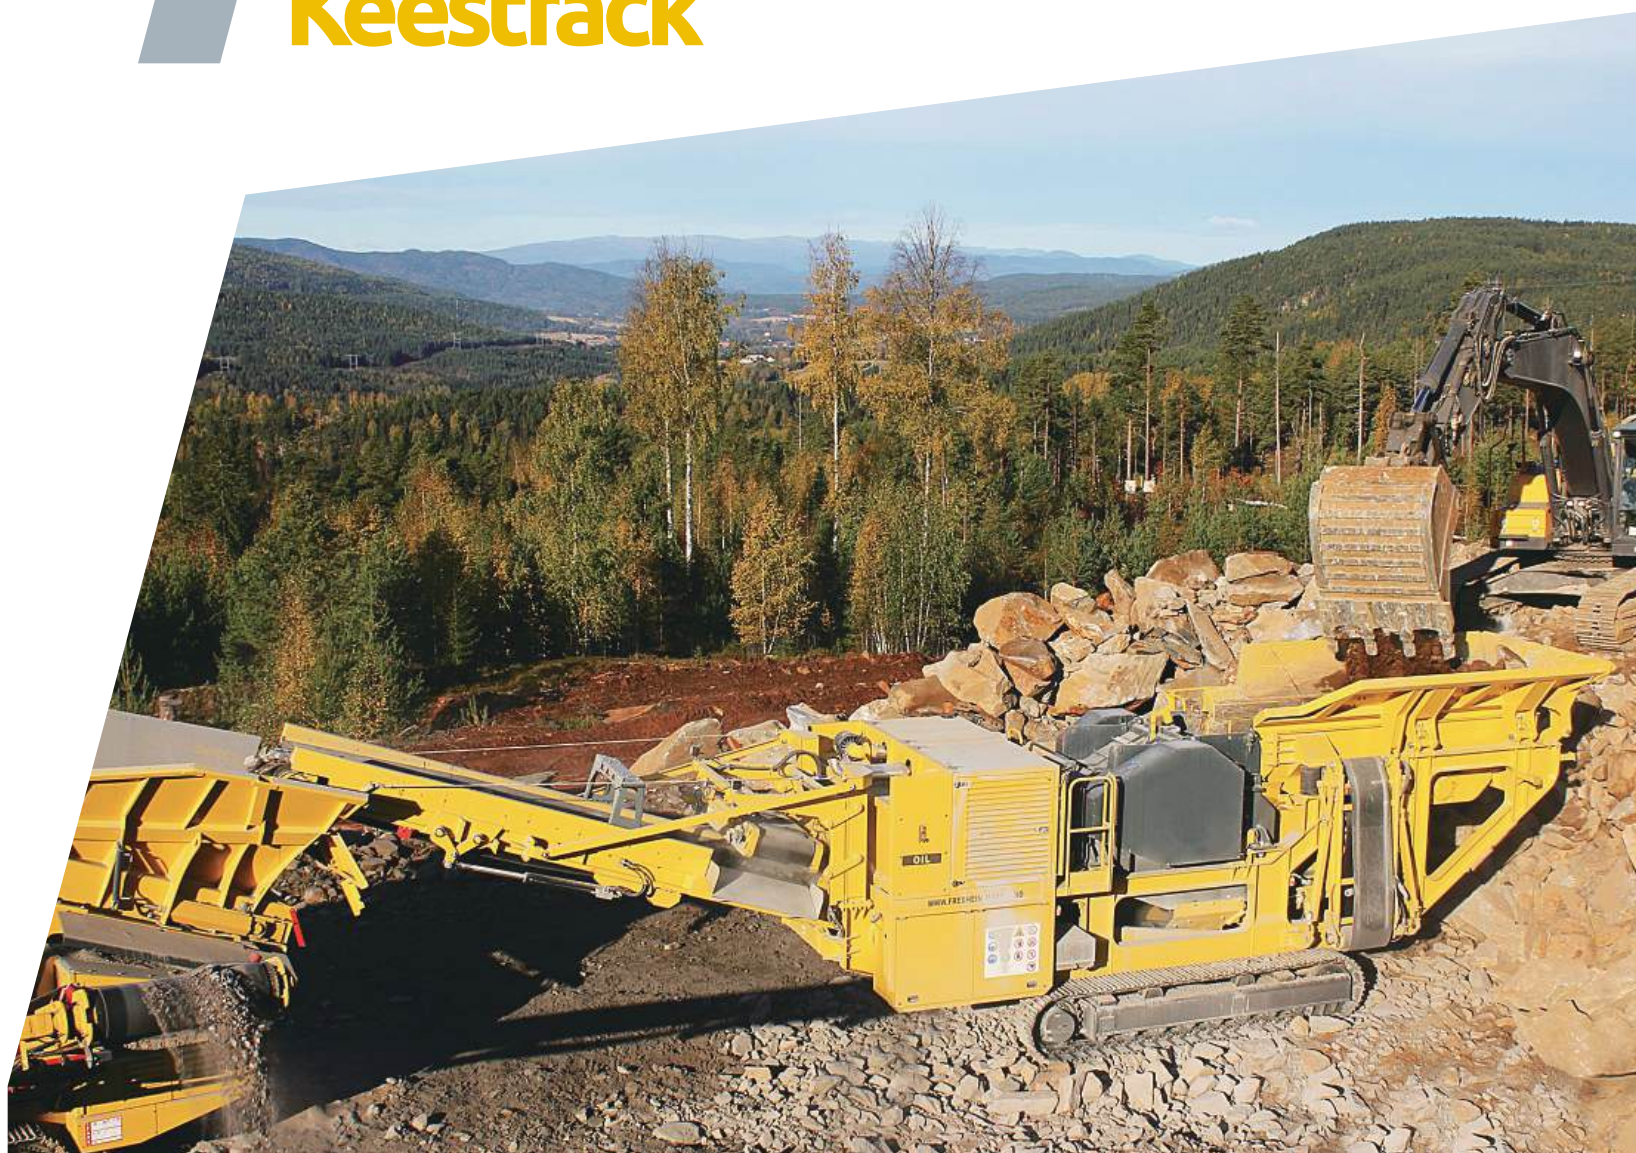


Performance in every detail

B3 JAW CRUSHER

| **Belgium** | **Czech** | **China** | **Italy** | **India** | **USA** |

B3 JAW CRUSHER

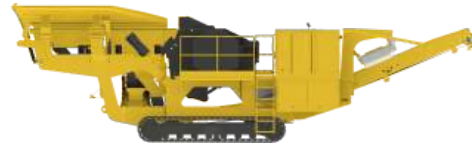

TECHNICAL SPECIFICATIONS

Feed hopper	
Capacity	4 m ³
Wear lining	HB 450
Feeding height	3.700 mm
Vibrating feeder	
Dimension (width x length)	920 x 4.130 mm
Pre-screen	
Screen type	Vibrating feeder with scalper
Dimension (width x length)	920 x 1.730 mm
Jaw crusher	
Inlet opening (width x height)	650 x 1.000 mm
Maximum feed size	500 mm
Outlet adjustment	45 - 160 mm
Throughput capacity	Up to 280 t / h
Drive	Hydraulic motor drive

Mainbelt conveyor	
Dimension (width x length)	800 x 8.800 mm
Discharge height	3.100 mm
Track-unit	
Dimension (width x length)	400 x 3.310 mm
2 speeds	1,1 / 2 km / h
Engine unit	
Power	139 kW / 1.500 rpm
Fuel tank	450 l
Hydraulic oil tank	430 l
Control	
Type	PLC - IP67
Display	4,3" LCD
Controller	Remote control

OPTIONS

Side pre-screen conveyor	
Dimension (width x length)	500 x 4.500 mm
Discharge height	2.600 mm
Dust suppression system	
Spraying area	Crusher outlet and middle of main conveyor
Water pump	1,1 kW
Water consumption	0,75 m ³ / h
Magnetic separator	
Height adjustment	Fixed or 150 - 350 mm adjustable

Fuel filling pump	
Flow capacity	80 l / min
Mainbelt conveyor special belt	
Type	K - Flex 630 / 1
Radio remote control	
Type	Handheld, multi functions remote control
Working light	
No. of lamps	4 pieces

OPTIONAL MODEL

B3v With independent 2 deck prescreen

TRANSPORT DIMENSIONS AND WEIGHT

Length : 12.500 mm
Height : 3.100 mm
Width : 2.540 mm
Weight : 29 t without options

